



MOG 50 Ohm coaxial cable RG213U SHF1 unarmoured and armoured



Store at: -20 to +60 °C

Install at: 0 to +50 °C, **Bend minimum:** 10 times O.D.

Operate at: -30 to +70 °C, **Bend minimum:** 5 times O.D

Design

Conductor : stranded bare copper 7×0.75mm

Dielectric : low density polyethylene Ø 7.25 ± 0.18 mm

Screen 1 : aluminium/poleysther/aluminium tape (width 29mm)

Screen 2 : bare copper braid (coverage 96%)

Outer jacket (inner jacket for armoured version): black Fire Retardant and UV Resistant SHF1 material, LSZH

Marking : APS Finland - ww/yy - RG213 MARINE SHF1 - 50 OHM - IEC60332-3-24 Cat C - lot + meter

Armoured version is supplied with additional:

Armour : galvanized steel wire braid

Outer jacket : black Fire Retardant and UV Resistant SHF1 thermoplastic material, LSZH

Marking : APS Finland - ww/yy - RG213 MARINE SHF1 ARMOURED - 50 OHM - IEC60332-3-24 Cat C - lot + meter

Environmental properties and Fire Performances

Degree of acidity of gases : IEC 60754-1, IEC 60754-2 (pH value $\geq 4,3$ and Conductivity $\leq 10\mu\text{S}/\text{mm}$)

Halogen acid gas : IEC 60754-1, IEC 60754-2 (Halogen acid gas emission $\leq 0.5\%$)

Smoke Emission : IEC 61034-2, EN 50268-2 (Transmittance) $\geq 60\%$)

Toxicity of evolved gas : EN 50305 9.2

Flame retardant : YES - IEC 60332-1-2

Fire retardant : YES - IEC 60332-3-22 Cat.A

Fire resistant : NO

Ozone resistant : available upon request

Weather resistant : available upon request

LSZH SHF2 : available upon request

Oil resistant : available upon request

MUD resistant : available upon request

Water resistant : available upon request

Water penetration : available upon request

UV resistant : YES - ASTM-D-2565-92A

Electrical characteristics (IEC60092-350, EN 50290-2-23, IEC61196-1-108)

Impedance : $50 \pm 5 \Omega$

Capacitance : $100 \pm 3 \text{ pF}/\text{m}$

Velocity ratio : 66%

Inner conductor resistance @ 500V : $36.5 \pm 1.5 \Omega/\text{km}$

Braid resistance @ 500V : $14 \pm 4 \Omega/\text{km}$

Spark tension of the sheath : 4.0kV

Attenuation

MHz	5	10	50	100	200	300	500	600	800	1000	1350	1500	1750	2150	2250	2500	2750	3000
dB	1.4	1.9	3.9	5.6	8.3	10.3	13.7	15.3	17.9	20.3	24.7	26.1	29.8	33.6	34.7	37.1	39.5	41.7

Return Loss (IEC61196-1-113)

MHz	30 ÷ 300	300 ÷ 600	600 ÷ 1000	1000 ÷ 2000	2000 ÷ 3000
dB	>22	>22	>22	>19	>18

Ordering and delivery information

Type	P/N	O.D [mm]	Weight [kg/km]	Packaging
RG213U Non-armoured	OC50R213U1	10.3	167.5	500m or 1000m (+/-5%)
RG213U GSWB armoured	OC50R213A1	13.7	303.6	500m (+/-5%)
RG213U TCWB-armoured	OC50R213T1	13.7	290.5	500m (+/-5%)
RG213U BWB armoured	OC50R213B1	13.7	300.6	500m (+/-5%)

Other standards of reference

IEC 60092-370	Electrical installations in ships: Guidance on the selection of cables for telecommunication and data.
DNV TAP 827.10/20	Type Approval Program - coaxial cables
ABS SVR	Rules for building and classing. Steel Vessels.
ABS SMR	Rules for building and classing. Steel vessels under 90 meters.
MIL-C-17	General specification for radio frequency coaxial cables
IEC61196-1	Coaxial communication cables
EN 50290-2-23	Insulation materials for telecommunication cables

Every effort has been put so that this document is most reliable and free from errors. However, AP Solutions Oy cannot be considered responsible for any mistake in this document and users should consult AP Solutions Oy for any information needed. AP Solutions Oy reserves the right to make changes to the documents at any time, without prior notice.



MOG 500hm coaxial cable RG214U SHF1 unarmoured and armoured



Store at: -20 to +60 °C

Install at: 0 to +50 °C
Bend minimum: 10 times O.D.
Operate at: -30 to +70 °C
Bend minimum: 5 times O.D

Design

Conductor : stranded silvered copper 7×0.75mm
Dielectric : low density polyethylene Ø 7.25 ± 0.18 mm
Screen 1 : aluminium/poleyster/aluminium tape (width 29mm)
Screen 2 : silvered copper braid (coverage 94%)
Screen 3 : silvered copper braid (coverage 98%)
Outer jacket (inner jacket for armoured version): black Fire Retardant and UV Resistant SHF1 material, LSZH
Marking : APS Finland - ww/yy - RG214 MARINE SHF1 - 50 OHM - IEC60332-3-24 Cat.C - lot + meter

Armoured version is supplied with additional:

Armour : galvanized steel wire braid
Outer jacket : black Fire Retardant and UV Resistant SHF1 thermoplastic material, LSZH
Marking : APS Finland - ww/yy - RG214 MARINE SHF1 ARMOURED - 50 OHM - IEC60332-3-24 Cat.C - lot + meter

Environmental properties and Fire Performances

Degree of acidity of gases : IEC 60754-1, IEC 60754-2 (pH value ≥ 4,3 and Conductivity ≤10µS/mm)
Halogen acid gas : IEC 60754-1, IEC 60754-2 (Halogen acid gas emission ≤ 0.5%)
Smoke Emission : IEC 61034-2, EN 50268-2 (Transmittance) ≥ 60%)
Toxicity of evolved gas : EN 50305 9.2
Flame retardant : YES - IEC 60332-1-2
Fire retardant : YES - IEC 60332-3-22 Cat.A
Fire resistant : NO
Ozone resistant : NO
Weather resistant : NO
LSZH SHF2 : NO
Oil resistant : NO
MUD resistant : NO
Water resistant : NO
Water penetration : NO
UV resistant : YES - ASTM-D-2565-92A

Electrical characteristics (IEC60092-350, EN 50290-2-23, IEC61196-1-108)

Impedance : $50 \pm 3 \Omega$

Capacitance : $100 \pm 9 \text{ pF/m}$

Velocity ratio : 66%

Inner conductor resistance @ 500V : $6 \pm 1.5 \Omega/\text{km}$

Braid resistance @ 500V : $4.4 \pm 4 \Omega/\text{km}$

Spark tension of the sheath : 5.5 kV

Attenuation

MHz	5	10	50	100	200	300	500	600	800	1000	1350	1500	1750	2150	2250	2500	2750	3000
dB	1.4	1.9	3.9	5.6	8.3	10.3	13.7	15.3	17.9	20.3	24.7	26.1	29.8	33.6	34.7	37.1	39.5	41.7

Return Loss (IEC61196-1-113)

MHz	30 ÷ 300	300 ÷ 600	600 ÷ 1000	1000 ÷ 2000	2000 ÷ 3000
dB	>22	>22	>22	>19	>18

Ordering and delivery information

Type	P/N	O.D [mm]	Weight [kg/km]	Packaging
RG213U Non-armoured	OC50R213U1	10.8	2102.2	500m or 1000m (+/-5%)
RG213U GSWB armoured	OC50R213A1	14.8	370.3	500m (+/-5%)
RG213U TCWB-armoured	OC50R213T1	14.8	350.3	500m (+/-5%)
RG213U BWB armoured	OC50R213B1	14.8	365.0	500m (+/-5%)

Other standards of reference

IEC 60092-370	Electrical installations in ships: Guidance on the selection of cables for telecommunication and data.
DNV TAP 827.10/20	Type Approval Program - coaxial cables
ABS SVR	Rules for building and classing. Steel Vessels.
ABS SMR	Rules for building and classing. Steel vessels under 90 meters.

MIL-C-17	General specification for radio frequency coaxial cables
IEC61196-1	Coaxial communication cables
EN 50290-2-23	Insulation materials for telecommunication cables

Every effort has been put so that this document is most reliable and free from errors. However, AP Solutions Oy cannot be considered responsible for any mistake in this document and users should consult AP Solutions Oy for any information needed. AP Solutions Oy reserves the right to make changes to the documents at any time, without prior notice.



MOG 500hm coaxial cable RG58CU SHF1 unarmoured and armoured



Store at: -40 to +70 °C

Install at -10 to +50 °C **Bend minimum:** 15 times O.D.

Operate at -30 to +70 °C, **Bend minimum** 10 times O.D.

Crush maximum : 2000N/100mm

Impact maximum: 25J

Design

Conductor : stranded tinned copper 19×0.18mm

Dielectric : low density polyethylene Ø2.95 ± 0.10 mm

Screen 1 : aluminium/poleysther/aluminium tape (width 15mm)

Screen 2 : tinned copper braid (coverage 93%)

Outer jacket (inner jacket for armoured version): black Fire Retardant and UV Resistant SHF1 material, LSZH

Marking : APS Finland - ww/yy - RG58 MARINE SHF1 - 50 OHM - IEC60332-3-24 Cat C - lot + meter

Armoured version is supplied with additional:

Armour : galvanized steel wire braid (tinned copper wire and bronze wire braid available upon request)

Outer jacket : black Fire Retardant and UV Resistant SHF1 thermoplastic material, LSZH

Marking : APS Finland - ww/yy - RG58 MARINE SHF1 "ARMOUR TYPE" - 50 OHM - IEC60332-3-24 Cat C - lot + meter

Environmental properties and Fire Performances

Degree of acidity of gases : IEC 60754-1, IEC 60754-2 (pH value ≥ 4,3 and Conductivity ≤10µS/mm)

Halogen acid gas : IEC 60754-1, IEC 60754-2 (Halogen acid gas emission ≤ 0.5%)

Smoke Emission : IEC 61034-2, EN 50268-2 (Transmittance) ≥ 60%)

Toxicity of evolved gas : NES 713, CEI 20-37/7

Flame retardant : YES - IEC 60332-1-2

Fire retardant : YES - IEC 60332-3-22 Cat.A

Fire resistant : NO

Ozone resistant : NO - DIN VDE 0472 part 805 B

Weather resistant : YES - ASTM G 154, EN 11507

LSZH SHF2 : NO - IEC 60092-359:1987-03

Oil resistant : NO (oil, fuels and hydrocarbons) - IEC60811

MUD resistant : NO - NEK 606:2009

Water resistant : YES - IEC60502

Water penetration : YES - IEC 60794-1-2-F5-B (inner core only)

UV resistant : YES - ASTM-D-2565-92A

Electrical characteristics (IEC60092-350, EN 50290-2-23, IEC61196-1-108)

Impedance : $50 \pm 3 \Omega$

Capacitance : 100 ± 9 pF/m

Velocity ratio : 66%

Inner conductor resistance @ 500V : $6 \pm 1.5 \Omega/\text{km}$ Braid resistance @ 500V : $4.4 \pm 1.5 \Omega/\text{km}$

Spark tension of the sheath : 5.5 kV

Attenuation

MHz	5	10	50	100	200	300	500	600	800	1000	1350	1500	1750	2150	2250	2500	2750	3000
dB	3.3	4.3	9.9	13.5	19.2	24.0	31.9	35.5	41.6	47.5	57.1	60.8	67.1	77.0	78.8	85.7	88.9	90.7

Return Loss (IEC61196-1-113)

MHz	30 ÷ 300	300 ÷ 600	600 ÷ 1000	1000 ÷ 2000	2000 ÷ 3000
dB	>28	>23	>20	>15	>15

Ordering and delivery information

Type	P/N	O.D [mm]	Weight [kg/km]	Packaging
RG58 Non-armoured	OC50R58U1	5.0	41.0	500m or 1000m (+/-5%)
RG58 GSWB armoured	OC50R58A1	10.0	11.5	500m (+/-5%)
RG58 TCWB armoured	OC50R58T1	10.0	110.0	500m (+/-5%)
RG58 BWB armoured	OC50R58B1	10.0	120.5	500m (+/-5%)

Other standards of reference

IEC 60092-370	Electrical installations in ships: Guidance on the selection of cables for telecommunication and data.
---------------	--

DNV TAP 827.10/20	Type Approval Program - coaxial cables
ABS SVR	Rules for building and classing. Steel Vessels.
ABS SMR	Rules for building and classing. Steel vessels under 90 meters.
MIL-C-17	General specification for radio frequency coaxial cables
IEC61196-1	Coaxial communication cables
EN 50290-2-23	Insulation materials for telecommunication cables

Every effort has been put so that this document is most reliable and free from errors. However, AP Solutions Oy cannot be considered responsible for any mistake in this document and users should consult AP Solutions Oy for any information needed. AP Solutions Oy reserves the right to make changes to the documents at any time, without prior notice.



MOG 750hm coaxial cable RG11AU SHF1 unarmoured and armoured



Store at: -20 to +60 °C

Install at: 0 to +50 °C, **Bend minimum:** 10/20 times O.D.

Operate at: -30 to +70 °C, **Bend minimum:** 5/15 times O.D

Design

Conductor : tinned copper 7×0,40mm

Dielectric : low density polyethylene Ø 7.25 ± 0.18 mm

Screen 1 : aluminium/poleysther/aluminium tape (width 29mm)

Screen 2 : bare copper braid (coverage 96%)

Screen 3 : N/A

Outer jacket (inner jacket for armoured version): black Fire Retardant and UV Resistant SHF1 material, LSZH

Marking : APS Finland - ww/yy - RG11 MARINE SHF1 - 75 OHM - IEC60332-3-24 Cat.C - DNV - lot + meter

Armoured version is supplied with additional:

Armour : galvanized steel wire braid

Outer jacket : black Fire Retardant and UV Resistant SHF1 thermoplastic material, LSZH

Marking : APS Finland - ww/yy - RG11 MARINE SHF1 ARMOURED - 75 OHM - IEC60332-3-24 Cat.C - DNV - lot + meter

Environmental properties and Fire Performances

Degree of acidity of gases : IEC 60754-1, IEC 60754-2 (pH value ≥ 4,3 and Conductivity ≤10µS/mm)

Halogen acid gas : IEC 60754-1, IEC 60754-2 (Halogen acid gas emission ≤ 0.5%)

Smoke Emission : IEC 61034-2, EN 50268-2 (Transmittance) ≥ 60%)

Toxicity of evolved gas : EN 50305 9.2

Flame retardant : YES - IEC 60332-1-2

Fire retardant : YES - IEC 60332-3-22 Cat.A

Fire resistant : NO

Ozone resistant : NO

Weather resistant : NO

LSZH SHF2 : NO

Oil resistant : NO
MUD resistant : NO
Water resistant : NO
Water penetration : NO
UV resistant : YES - ASTM-D-2565-92A

Electrical characteristics (IEC60092-350, EN 50290-2-23, IEC61196-1-108)

Impedance : $75 \pm 3 \Omega$
Capacitance : $67 \pm 3 \text{ pF/m}$
Velocity ratio : 66%
Inner conductor resistance @ 500V : $20.5 \pm 1.5 \Omega/\text{km}$
Braid resistance @ 500V : $4.4 \pm 1.5 \Omega/\text{km}$ Spark tension of the sheath : 5.5 kV

Attenuation

MHz	5	10	50	100	200	300	500	600	800	1000	1350	1500	1750	2150	2250	2500	2750	3000
dB	1.4	2.0	5.0	7.2	10.5	13.0	17.1	19.0	22.4	25.5	30.4	32.5	35.6	40.9	41.6	44.1	46.5	50.1

Return Loss (IEC61196-1-113)

MHz	30 ÷ 300	300 ÷ 600	600 ÷ 1000	1000 ÷ 2000	2000 ÷ 3000
dB	>27	>27	>23	>18	>16


Ordering and delivery information

Type	P/N	O.D [mm]	Weight [kg/km]	Packaging		
RG11U Non-armoured	OC75R11U1	10.3	149.6	500m or 1000m (+/-5%)		
RG11U GSWB armoured	OC75R11A1	13.7	285.7	500m (+/-5%)		
RG11U TCWB armoured	OC75R11T1	13.7	265.0	500m (+/-5%)		
RG11U BWB armoured	OC75R11B1	13.7	270.0	500m (+/-5%)		

Other standards of reference

IEC 60092-370	Electrical installations in ships: Guidance on the selection of cables for telecommunication and data.
DNV TAP 827.10/20	Type Approval Program - coaxial cables
ABS SVR	Rules for building and classing. Steel Vessels.
ABS SMR	Rules for building and classing. Steel vessels under 90 meters.
MIL-C-17	General specification for radio frequency coaxial cables
IEC61196-1	Coaxial communication cables
EN 50290-2-23	Insulation materials for telecommunication cables

Every effort has been put so that this document is most reliable and free from errors. However, AP Solutions Oy cannot be considered responsible for any mistake in this document and users should consult AP Solutions Oy for any information needed. AP Solutions Oy reserves the right to make changes to the documents at any time, without prior notice.

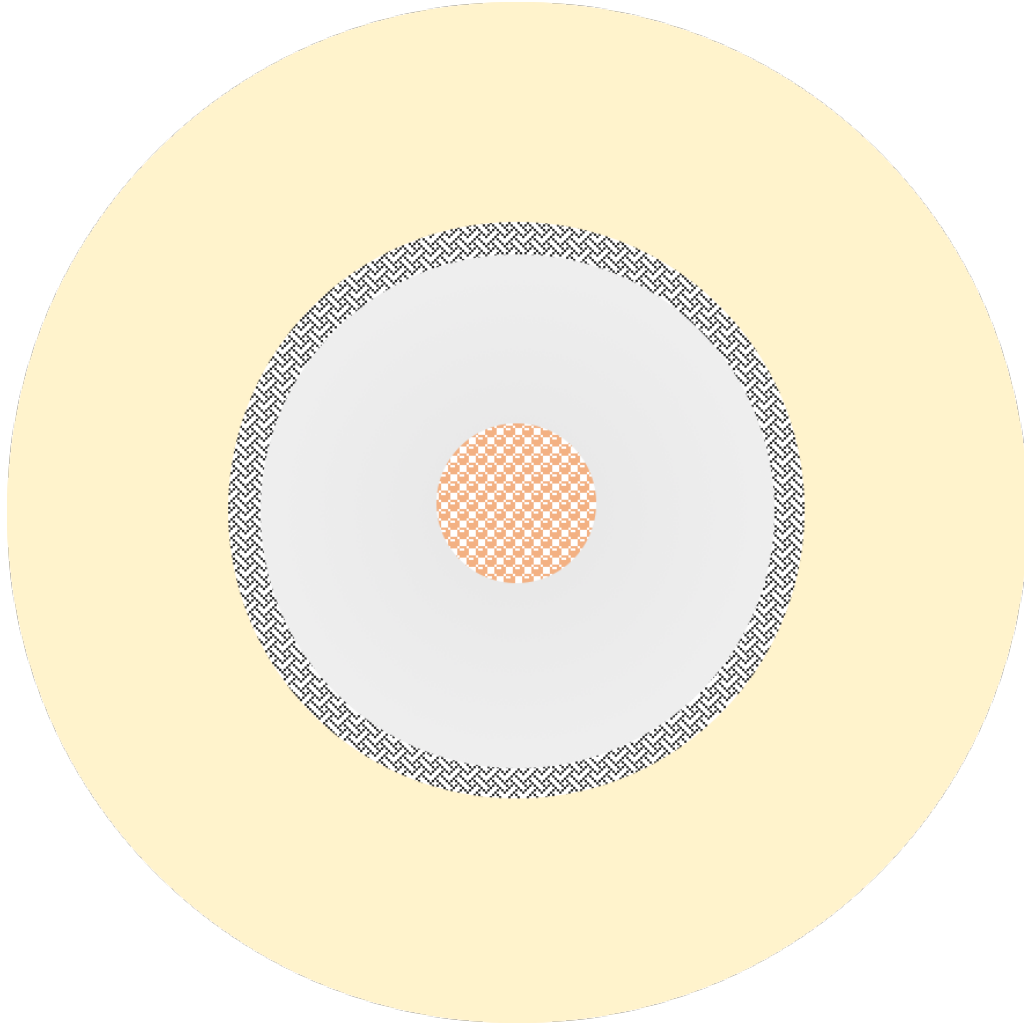

Coaxial cable 50 Ohm PLENUM RG58/U



Store at: -40 to +70 °C

Install at -10 to +50 °C, **Bend minimum** 15 times O.D.

Operate at -40 to +200°C, **Bend minimum** 10 times O.D.

Max recommended pulling tension 40 lbs

Design

Conductor : stranded barecopper AWG20 19×32

Dielectric : foam FEP 0.102"

Screen 1 : tinned copper braid coverage 95%

Outer jacket : Ivory FEP 0.158" nom.

Marking : APS Finland - ww/yy - RG58 PLENUM - 50 OHM - 200°C FT6 - lot + ft

Note : the Jacket is sequentially footmarked.

Environmental properties and Fire Performances

Flame retardant : NFPA 262 PLENUM, FT6

Electrical characteristics

Impedance : 52 Ω nominal

Capacitance : 25 pF/ft nominal (@ 1KHz)

Velocity ratio : 82%

DC resistance @ 20°C : 8.8 Ω/1m nominal

Attenuation

MHz	1	10	50	100	400	700	900	1000
dB/100FT	0.5	1.3	3.2	4.9	11.1	15.3	18.4	19.6

Ordering and delivery information

Type	P/N	O.D [in / mm]	Weight [lbs/m / kg/m]	Packaging (standard)
RG58/U PLENUM	C50R58P	0.158 / 4.0	0.17 / 7.72	1000ft or 305m (+/-5%)

Other standards of reference

-

Every effort has been put so that this document is most reliable and free from errors. However, AP Solutions Oy cannot be considered responsible for any mistake in this document and users should consult AP Solutions Oy for any information needed. AP Solutions Oy reserves the right to make changes to the documents at any time, without prior notice.



MOG 750hm coaxial cable RG59BU SHF1 unarmoured

and armoured



Store at: -20 to +60 °C

Install at: 0 to +50 °C, **Bend minimum:** 10/20 times O.D.

Operate at: -30 to +70 °C, **Bend minimum:** 5/15 times O.D.

Design

Conductor : copperweld Ø 0.58 ± 0.025 mm

Dielectric : low density polyethylene Ø 3.70 ± 0.15 mm

Screen 1 : aluminium/poleyster/aluminium tape (width 18mm)

Screen 2 : bare copper braid (coverage 93%)

Screen 3 : N/A

Outer jacket (inner jacket for armoured version): black Fire Retardant and UV Resistant SHF1 material, LSZH

Marking : APS Finland - ww/yy - RG59 MARINE SHF1 - 75 OHM - IEC60332-3-24 Cat.C - DNV - lot + meter

Armoured version is supplied with additional:

Armour : galvanized steel wire braid

Outer jacket : black Fire Retardant and UV Resistant SHF1 thermoplastic material, LSZH

Marking : APS Finland - ww/yy - RG59 MARINE SHF1 ARMOURED - 75 OHM - IEC60332-3-24 Cat.C - DNV - lot + meter

Environmental properties and Fire Performances

Degree of acidity of gases : IEC 60754-1, IEC 60754-2 (pH value ≥ 4,3 and Conductivity ≤10µS/mm)

Halogen acid gas : IEC 60754-1, IEC 60754-2 (Halogen acid gas emission ≤ 0.5%)

Smoke Emission : IEC 61034-2, EN 50268-2 (Transmittance) ≥ 60%)

Toxicity of evolved gas : EN 50305 9.2

Flame retardant : YES - IEC 60332-1-2

Fire retardant : YES - IEC 60332-3-22 Cat.A

Fire resistant : NO

Ozone resistant : NO

Weather resistant : NO

LSZH SHF2 : NO

Oil resistant : NO
MUD resistant : NO
Water resistant : NO
Water penetration : NO
UV resistant : YES - ASTM-D-2565-92A

Electrical characteristics (IEC60092-350, EN 50290-2-23, IEC61196-1-108)

Impedance : $75 \pm 3 \Omega$
Capacitance : 67 ± 3 pF/m
Velocity ratio : 66%
Inner conductor resistance @ 500V : $154 \pm 5 \Omega/\text{km}$
Braid resistance @ 500V : $9 \pm 3 \Omega/\text{km}$
Spark tension of the sheath : 4.5 kV

Attenuation

MHz	5	10	50	100	200	300	500	600	800	1000	1350	1500	1750	2150	2250	2500	2750	3000
dB	2.7	3.4	7.3	10.7	15.0	18.6	24.8	27.0	31.5	35.6	41.7	44.8	49.2	55.6	59.7	63.0	67.7	50.1

Return Loss (IEC61196-1-113)

MHz	30 ÷ 300	300 ÷ 600	600 ÷ 1000	1000 ÷ 2000	2000 ÷ 3000
dB	>28	>23	>18	>14	>14


Ordering and delivery information

Type	P/N	O.D [mm]	Weight [kg/km]	Packaging
RG59BU Non-armoured	OC75R59U1	6.2	57.2	500m or 1000m (+/-5%)
RG59BU GSWB armoured	OC75R59A1	9.4	144.2	500m (+/-5%)
RG59BU TCWB armoured	OC75R59T1	9.4	130.0	500m (+/-5%)
RG59BU BWB armoured	OC75R59B1	9.4	140.5	500m (+/-5%)

Other standards of reference

IEC 60092-370	Electrical installations in ships: Guidance on the selection of cables for telecommunication and data.
DNV TAP 827.10/20	Type Approval Program - coaxial cables
ABS SVR	Rules for building and classing. Steel Vessels.
ABS SMR	Rules for building and classing. Steel vessels under 90 meters.
MIL-C-17	General specification for radio frequency coaxial cables
IEC61196-1	Coaxial communication cables
EN 50290-2-23	Insulation materials for telecommunication cables

Every effort has been put so that this document is most reliable and free from errors. However, AP Solutions Oy cannot be considered responsible for any mistake in this document and users should consult AP Solutions Oy for any information needed. AP Solutions Oy reserves the right to make changes to the documents at any time, without prior notice.

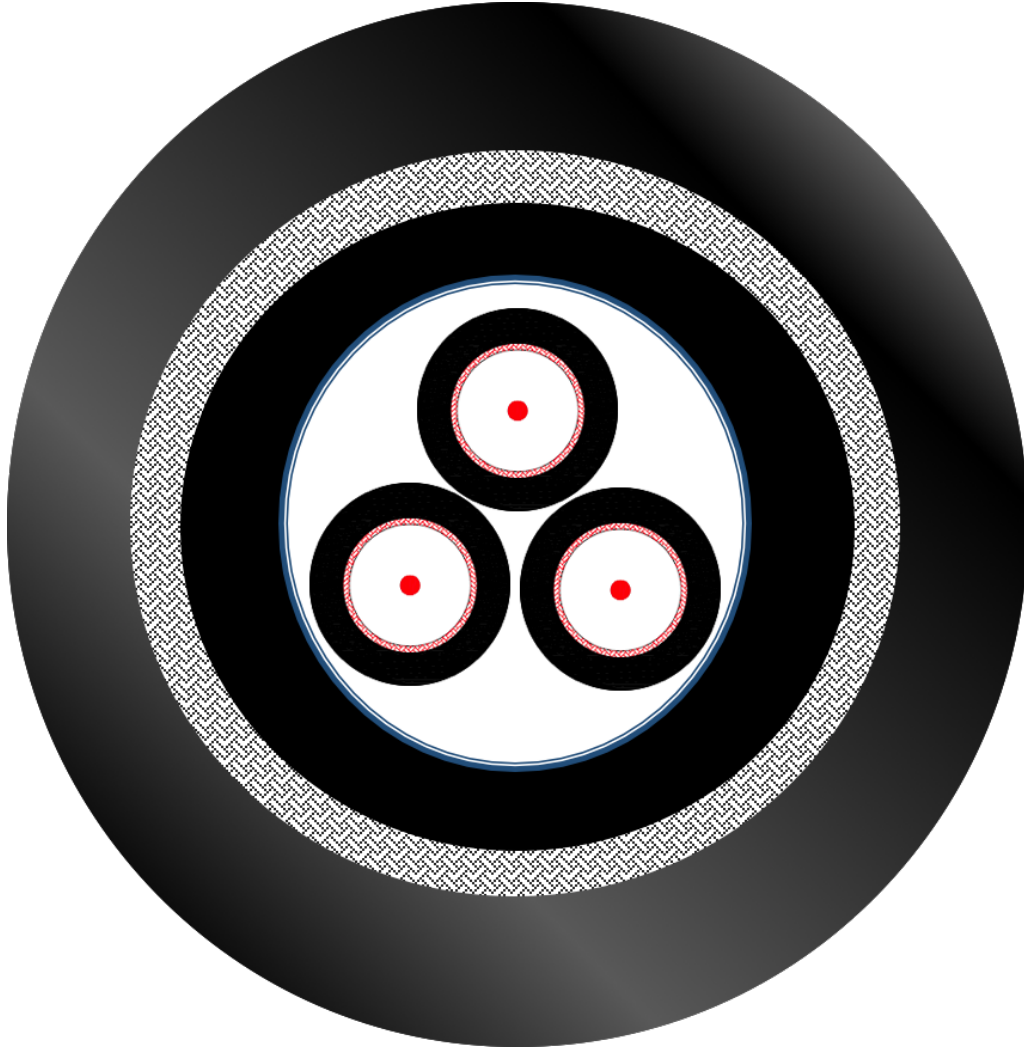

MOG 750hm multi-coaxial cable 3 x RG59BU LSZH



Store at: -20 to +60 °C

Install at: 0 to +50 °C, **Bend minimum:** 10/20 times O.D.

Operate at: -30 to +70 °C, **Bend minimum:** 5/15 times O.D.

Design

Conductor : copperweld $\varnothing 0.58 \pm 0.025$ mm

Dielectric : low density polyethylene $\varnothing 3.70 \pm 0.15$ mm

Screen 1 : aluminium/poleysther/aluminium tape (width 18mm)

Screen 2 : bare copper braid (coverage 93%)

Jacket 1 : black Fire Retardant LSZH material, white numbered 1 to 3

Assembling : 3 numbered coaxial cables stranded together into a compact core, with fillers if needed (fillers are always used for the armoured version).

Jacket 2 : black Fire Retardant LSZH material

Marking : APS Finland - ww/yy - 3 x RG59 BU - 75 OHM - LSZH - lot + meter

Armoured version is supplied with additional:

Armour : galvanized steel, copper or bronze wire braid

Outer jacket : black LSZH Fire Retardant and UV Resistant thermoplastic material

Marking : APS Finland - ww/yy - ARMOURED 3 x RG59 BU - 75 OHM - LSZH UVR - lot + meter

Environmental properties and Fire Performances

Degree of acidity of gases : IEC 60754-1, IEC 60754-2

Halogen acid gas : IEC 60754-1, IEC 60754-2

Smoke Emission : IEC 61034-2, EN 50268-2

Toxicity of evolved gas : EN 50305 9.2

Flame retardant : IEC 60332-1-2

Electrical characteristics (IEC60092-350, EN 50290-2-23, IEC61196-1-108)

Impedance : $75 \pm 3 \Omega$

Capacitance : 67 ± 3 pF/m

Velocity ratio : 66%

Inner conductor resistance @ 500V : $154 \pm 5 \Omega/\text{km}$

Braid resistance @ 500V : $9 \pm 3 \Omega/\text{km}$

Spark tension of the sheath : 4.5 kV

Attenuation

MHz	5	10	50	100	200	300	500	600	800	1000	1350	1500	1750	2150	2250	2500	2750	3000
dB	2.7	3.4	7.3	10.7	15.0	18.6	24.8	27.0	31.5	35.6	41.7	44.8	49.2	55.6	59.7	63.0	67.7	50.1

Return Loss (IEC61196-1-113)

MHz	30 ÷ 300	300 ÷ 600	600 ÷ 1000	1000 ÷ 2000	2000 ÷ 3000
dB	>28	>23	>18	>14	>14

Ordering and delivery information

Type	P/N	Nom. diam. [mm] Single cable	Nom. O.D [mm]	Weight [kg/km]	Packaging
RG59BU Non-arm.	C75R59UZ	6.2	14.0	186.6	500m (+/-5%)
RG59BU GSWB	C75R59AZ	6.2	18.0	447.6	500m (+/-5%)
RG59BU TCWB	C75R59TZ	6.2	18.0	405.0	500m (+/-5%)
RG59BU BWB	C75R59BZ	6.2	18.0	436.5	500m (+/-5%)

Other standards of reference

MIL-C-17	General specification for radio frequency coaxial cables
IEC61196-1	Coaxial communication cables
EN 50290-2-23	Insulation materials for telecommunication cables

Every effort has been put so that this document is most reliable and free from errors. However, AP Solutions Oy cannot be considered responsible for any mistake in this document and users should consult AP Solutions Oy for any information needed. AP Solutions Oy reserves the right to make changes to the documents at any time, without prior notice.



MOG 750hm coaxial cable RG6AU SHF1 unarmoured and armoured



Store at: -20 to +60 °C

Install at: 0 to +50 °C, **Bend minimum:** 10/20 times O.D.

Operate at: -30 to +70 °C, **Bend minimum:** 5/15 times O.D.

Design

Conductor : copperweld Ø 0,72 ± 0.025 mm

Dielectric : low density polyethylene Ø 4.70 ± 0.20 mm

Screen 1 : aluminium/poleysther/aluminium tape (width 20mm)

Screen 2 : silvered copper braid (coverage 96%)

Screen 3 : plain copper braid (coverage 96%)

Outer jacket (inner jacket for armoured version): black Fire Retardant and UV Resistant SHF1 material, LSZH

Marking : APS Finland - ww/yy - RG6 MARINE SHF1 - 75 OHM - IEC60332-3-24 Cat.C - lot + meter

Armoured version is supplied with additional:

Armour : galvanized steel wire braid

Outer jacket : black Fire Retardant and UV Resistant SHF1 thermoplastic material, LSZH

Marking : APS Finland - ww/yy - RG6 MARINE SHF1 ARMOURED - 75 OHM - IEC60332-3-24 Cat.C - DNV - lot + meter

Environmental properties and Fire Performances

Degree of acidity of gases : IEC 60754-1, IEC 60754-2 (pH value $\geq 4,3$ and Conductivity $\leq 10\mu\text{S}/\text{mm}$)

Halogen acid gas : IEC 60754-1, IEC 60754-2 (Halogen acid gas emission $\leq 0.5\%$)

Smoke Emission : IEC 61034-2, EN 50268-2 (Transmittance) $\geq 60\%$)

Toxicity of evolved gas : EN 50305 9.2

Flame retardant : YES - IEC 60332-1-2

Fire retardant : YES - IEC 60332-3-22 Cat.A

Fire resistant : NO

Ozone resistant : NO

Weather resistant : NO

LSZH SHF2 : NO

Oil resistant : NO

MUD resistant : NO

Water resistant : NO

Water penetration : NO

UV resistant : YES - ASTM-D-2565-92A

Electrical characteristics (IEC60092-350, EN 50290-2-23, IEC61196-1-108)

Impedance : $75 \pm 3 \Omega$ Capacitance : $67 \pm 3 \text{ pF}/\text{m}$

Velocity ratio : 66%

Inner conductor resistance @ 500V : $97 \pm 3 \Omega/\text{km}$

Braid resistance @ 500V : $5 \pm 3 \Omega/\text{km}$

Spark tension of the sheath : 6 kV

Attenuation

MHz	5	10	50	100	200	300	500	600	800	1000	1350	1500	1750	2150	2250	2500	2750	3000
dB	2.0	2.8	6.0	8.5	12.0	15.0	19.8	21.9	25.5	29.1	34.2	36.6	39.9	45.6	46.5	49.4	52.0	55.8
						4												

Return Loss (IEC61196-1-113)

MHz	30 ÷ 300	300 ÷ 600	600 ÷ 1000	1000 ÷ 2000	2000 ÷ 3000
dB	>28	>20	>19	>16	>15

Ordering and delivery information

Type	P/N	O.D [mm]	Weight [kg/km]	Packaging		
RG6AU Non-armoured	OC75R6U1	8.5	125.5	500m or 1000m (+/-5%)		
RG6AU GSWB armoured	OC75R6A1	11.5	229.4	500m (+/-5%)		
RG6AU TCWB armoured	OC75R6T1	11.5	208.5	500m (+/-5%)		
RG6AU BWB armoured	OC75R6B1	11.5	219.5	500m (+/-5%)		

Other standards of reference

IEC 60092-370	Electrical installations in ships: Guidance on the selection of cables for telecommunication and data.
DNV TAP 827.10/20	Type Approval Program - coaxial cables
ABS SVR	Rules for building and classing. Steel Vessels.
ABS SMR	Rules for building and classing. Steel vessels under 90 meters.
MIL-C-17	General specification for radio frequency coaxial cables
IEC61196-1	Coaxial communication cables
EN 50290-2-23	Insulation materials for telecommunication cables

Every effort has been put so that this document is most reliable and free from errors. However, AP Solutions Oy cannot be considered responsible for any mistake in this document and users should consult AP Solutions Oy for any information needed. AP Solutions Oy reserves the right to make changes to the documents at any time, without prior notice.