

SCS6AS Keystone jack, STP Screened, Category 6A, Tool-less



Standards of reference and applications

Standards : IEC60603-7-5, ISO/IEC 11801, IL/cUL Safety Standards, EIA/TIA 568b.2-1, EN 50173

Applications : 1000BASE-T Gigabit Ethernet , 100BASE-TX Fast Ethernet, 10 Base-T Ethernet, 622Mbps ATM , 155Mbps ATM

Features

- Standard RJ45 footprint
- High quality die cast housing
- Fast, easy, reliable termination
- Clear IDC termination colour coding
- Suitable for foil and braided screen cables
- Suitable for 10 Gigabit Ethernet application

Wiring Specifications T568A & T568B
25 Years System Warranty

Installation Features

Store at -40 to +70 °C
Install at -0 to +50 °C
Operate at : -20 to +60 °C
Fitting : keystone jack

Design

Dimensions : 14.5 x 40.0 x 25.0 mm
Material : cast alloy, lead frame
Holder and IDC block : PC resin, UL94 V-0
Contacts and IDC terminal : phosphor bronze
Conductor : 26-22 AWG
Insulation : 1.15mm
Connector type : RJ45 8(8)
Connection type : insulation displacement
Round cable outer diameter : 5.0 – 9.0 mm
Flat cable outer diameter : NO
Tool : no tool
Cable tie : 1 pc
Pack : 24pc/bag – 504pcs/box

Ordering and delivery information

P/N	Packaging
KJ6ASTPNY	10 pcs/bag

Recommended connectivity


Cable : DCC6AFTP4PV, DCC6AFTP4PH, DCC6AFTP4PE
Patch panel : PPE24SU
Patchcords : PCMJ6F series, PCMJ6S series
Faceplates : FP86150S245, FP86171S245



Extended System Warranty

The APS System Warranty assures the compliance of the system performance to the applicable class of cabling for a period of 25 years. The warranty may be applied for by an accredited APS Partner who has designed and/or installed the entire system.

Every effort has been put so that this document is most reliable and free from errors. However, AP Solutions Oy cannot be considered responsible for any mistake in this document and users should consult AP Solutions Oy for any information needed. AP Solutions Oy reserves the right to make changes to the documents at any time, without prior notice.

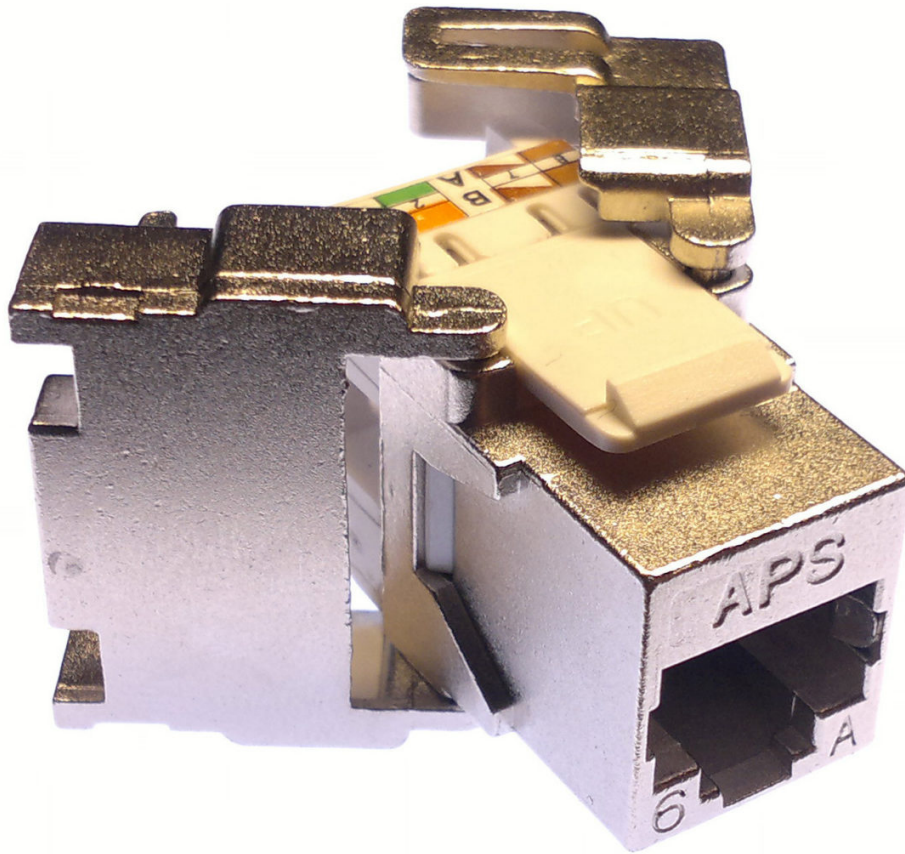

SCS6AS Keystone jack, STP Screened, Category 6A, Tool-less, Butterfly style



Standards of reference and applications

Standards : IEC60603-7-5, ISO/IEC 11801, IL/cUL Safety Standards, EIA/TIA 568b.2-1, EN 50173

Applications : 1000BASE-T Gigabit Ethernet , 100BASE-TX Fast Ethernet, 10 Base-T Ethernet, 622Mbps ATM , 155Mbps ATM

Features

Standard RJ45 footprint
High quality die cast housing
Fast, easy, reliable termination
Clear IDC termination colour coding
Suitable for foil and braided screen cables
Suitable for 10 Gigabit Ethernet application
Wiring Specifications T568A & T568B
25 Years System Warranty

Installation Features

Store at -40 to +70 °C
Install at -0 to +50 °C
Operate at : -20 to +60 °C
Fitting : keystone jack

Design

Dimensions : 18.4 x 38.4 x 25.7 mm
Material : cast alloy, lead frame
SCP : SUS304
Holder : PC resin, UL94 V-O
Contacts : 5100W phosphor bronze
IDC terminal : phosphor bronze
IDC block : PC resin, UL94 V-O
Conductor : 24-22 AWG
Insulation : 1.15mm
Connector type : RJ45 8(8)
Connection type : insulation displacement
Round cable outer diameter : 5.0 – 9.0 mm
Flat cable outer diameter : NO
Tool : no tool
Cable tie : 1 pc

Ordering and delivery information

P/N	Packaging
KJ6ASTPNH	10 pcs/bag

Recommended connectivity

Cable : DCC6AFTP4PV, DCC6AFTP4PH, DCC6AFTP4PE

Patch panel : PPE24SU

Patchcords : PCMJ6F series, PCMJ6S series

Faceplates : FP86150S245, FP86171S245

Extended System Warranty

The APS System Warranty assures the compliance of the system performance to the applicable class of cabling for a period of 25 years. The warranty may be applied for by an accredited APS Partner who has designed and/or installed the entire system.

Every effort has been put so that this document is most reliable and free from errors. However, AP Solutions Oy cannot be considered responsible for any mistake in this document and users should consult AP Solutions Oy for any information needed. AP Solutions Oy reserves the right to make changes to the documents at any time, without prior notice.